

Wouss

Lighting Emotion



SCAPINI S0



SCAPINI S1



SCAPINI S2



SCAPINI S3



SCAPINI S4

SCAPINI

Designed by Benoit LALLOZ



SCAPINI S0



SCAPINI S1

SCAPINI S2



Range	Spotlight for accent lighting Designed by Benoit Laloz		
Description	Black or natural anodized aluminum body Directional bracket		
Dimensions	Scapini S0	Scapini S1	Scapini S2
	Spotlight length : 24mm Spotlight width : 14.2mm Bracket width : 18mm	Spotlight length : 37.6mm Spotlight width : 24mm Bracket width : 24mm	Spotlight length : 90.75mm Spotlight width : 49.5mm Bracket width : 48mm
Net weight	0.012 kg	0.029 kg	0.266 kg
LED characteristics	2700K – 3000K – 4000K (other upon request)		
Optical beams	15° - 25° - 30° - 40° - 50° - 60° - 80° (other upon request)		
Connection	Supplied with 0.5m cable (more length upon request) Individual or series connection on external driver		
Power supply	External constant current driver 500mA max. For the US & Canada, use UL class 2 driver		
Power	Scapini S0 / Scapini S1	Scapini S2	
	350mA : 1.2W 500mA : 1.8W	350mA : 4.8W 500mA : 7.2W	
Use limitations	The product must be installed into a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees. The drivers, if not delivered by LOuss, must be approved before use		
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labor warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in		





SCAPINI S0

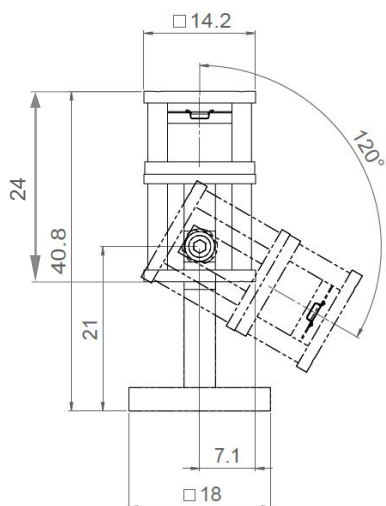

SCAPINI S1

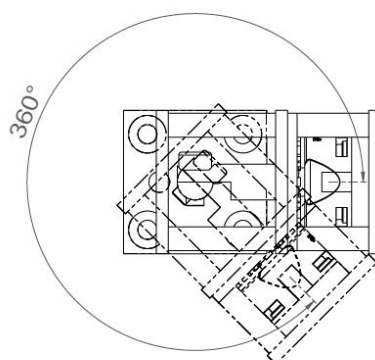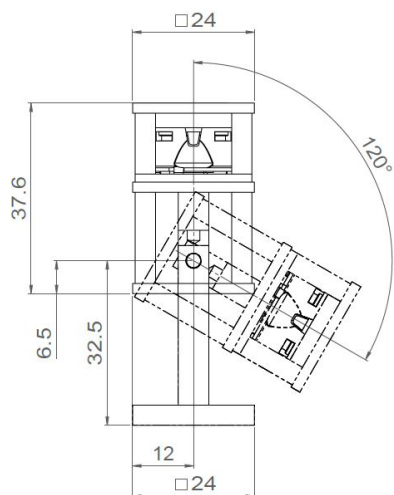

SCAPINI S2

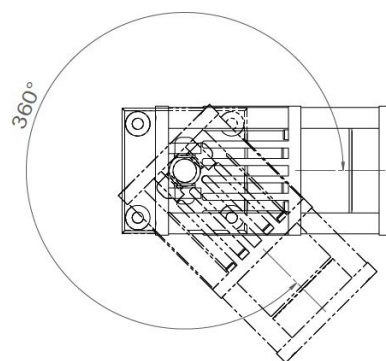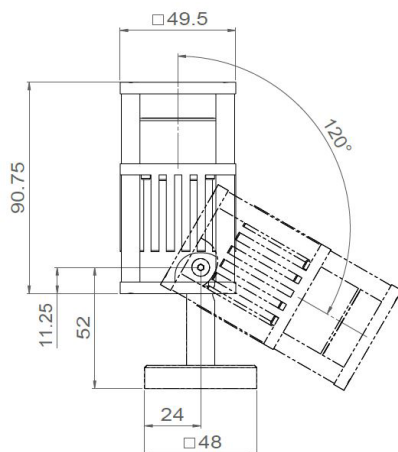

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

Last update : 2025.07.01

Wouss

BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best & LOuss

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



SCAPINI

•

SCAPINI S3

•



SCAPINI S4

Gamme	Scapini S3	Scapini S4
	Luminaire décoratif d'accentuation	Projecteur pour éclairage intérieur
Description	Corps en aluminium anodisé naturel ou noir Fixé sur patère orientable	
Dimensions & Poids	Scapini S3	Scapini S4
	Longueur du spot : 237mm Largeur du spot : 140mm Poids : 6.6 kg	Longueur du spot : 325mm Largeur du spot : 200mm Largeur de la patère : 150mm Poids : xxx kg
Caractéristiques LED	Scapini S3	Scapini S4
	6 LED : 3000K – 4000K (autres sur demande)	18 LED : 3000K – 4000K (autres sur demande)
Optiques	6° - 15° - 35° (autres sur demande)	
Raccordement	Fourni avec 0.5m de câble (autres longueurs sur demande) Raccordement direct 230V	
Alimentation intégrée	230 Vac Pour les USA & le Canada, utiliser un driver UL class 2	
Consommation	Scapini S3	Scapini S4
	15W max.	50W max.
Conditions d'utilisation	Le produit doit être installé par un professionnel, dans une zone ventilée Toute utilisation dans une température ambiante supérieure à 25° peut conduire à une mortalité prématurée du produit et le retrait de la garantie Les drivers, s'ils ne sont pas fournis par LOuss, doivent être approuvés avant utilisation Tous les produits sont testés avant livraison	
Garantie	Durée de vie : L80B10 à 50 000 heures (80% de flux restant) à 25°C température ambiante Garantie 3 ans pièces et main d'œuvre Cette garantie couvre les problèmes liés à la fabrication et les composants de notre fourniture La garantie ne s'applique pas si le produit a été ouvert, modifié ou réparé. Les dommages causés par un mauvais raccordement, la foudre, une surtension ou une mauvaise utilisation ne sont pas pris en charge Les réparations sont effectuées en atelier	



All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.
Last update : 2025.07.01



SCAPINI S3

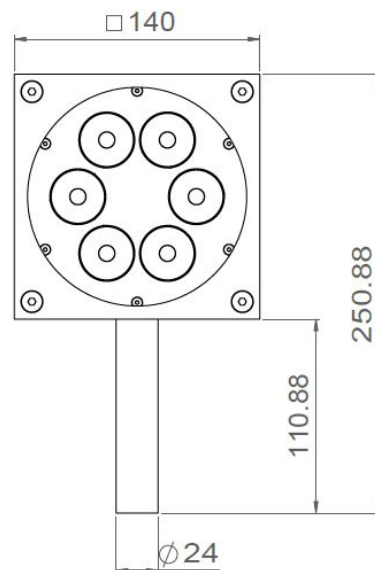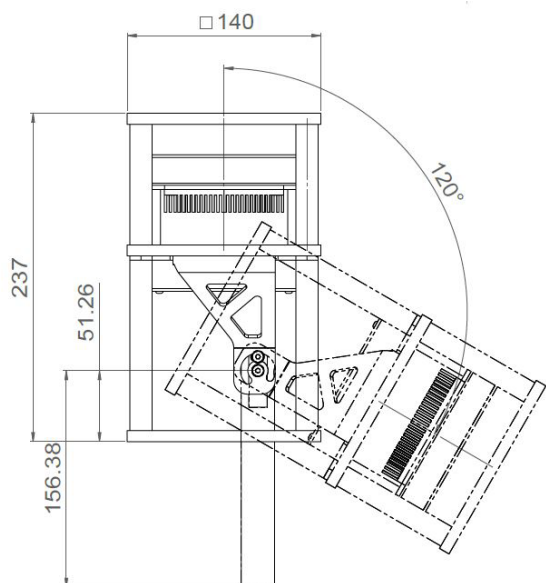

SCAPINI S4

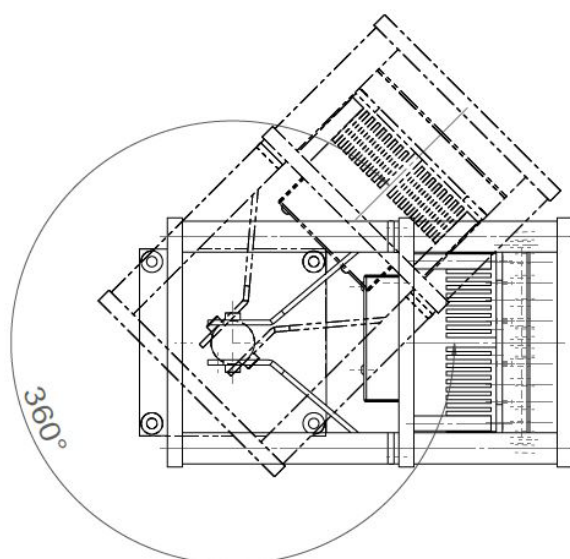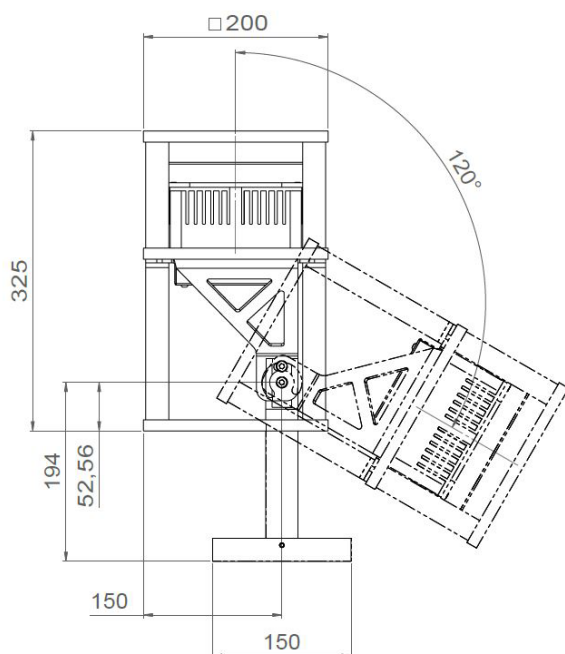

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

Last update : 2025.07.01

Wouss

BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best & LOuss

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE