
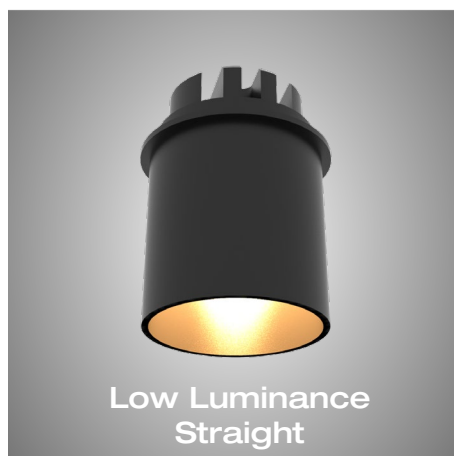


MINI FILED

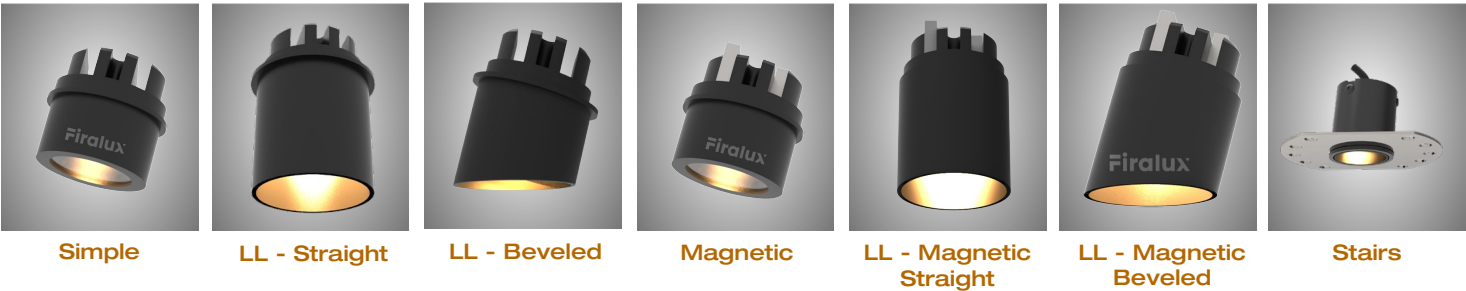


MINIFILED

Range	Recessed spotlight for accent lighting
Description	Anodized aluminium body Versions : • Simple • Low Luminance - Straight • Low Luminance - Beveled : 3° - 7° - 10° - 15° - 20° • Stairs (spotlight + mounting frame)
Finish	Velvet-looking black matt finish
Dimensions	Installation diameter : 24.6mm (Simple) 27mm (Low Luminance versions) 55mm (Stairs) Plate dimensions : 50mm (Magnetic) 80 x 64mm (Stairs) Length : 25mm to 46.6mm according to version
Spotlight weight	± 0.025 kg according to version
LED characteristics	1 or 2 LED : 2700K - 3000K - 3500K - 4000K (other upon request) Or combination of colour temperatures upon customer's request MacAdam ellipse: 3 SDCM CRI: 90
Optical beam	8° - 14° - 21° - 26° - 30° - 40°
Luminous flux	1 LED : 80 lumen 2 LEDs : 160 lumen
Connection	Delivered alone or with easy plug system for daisy chain : 110mm or 250mm wires and male + female quick connectors + shunt end of line, for serial connection
Separate power supply	700mA max remote constant current driver For the US & Canada, use a UL class 2 driver
LED power	1 LED : 1W 2 LEDs : 2W
Use limitations	The product must be installed into a ventilated area. Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees. The drivers, if not delivered by LOuss, must be approved before use
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty. The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product. All products are electrically tested and received a functional burn-in




All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.



MINIFILED SIMPLE

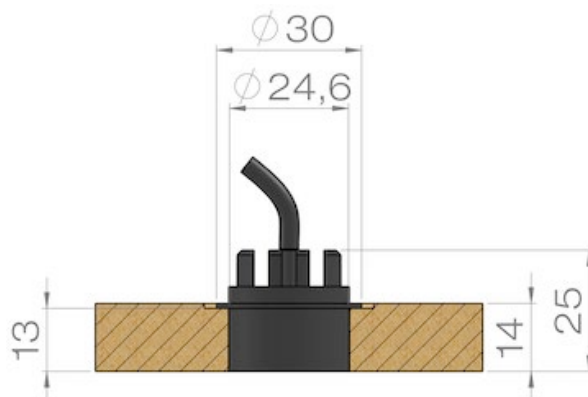

MINIFILED LOW LUMINANCE STRAIGHT

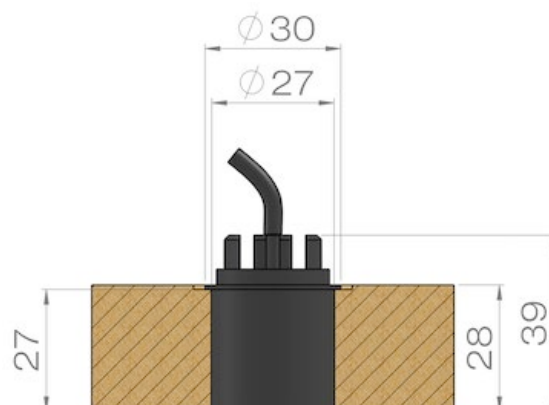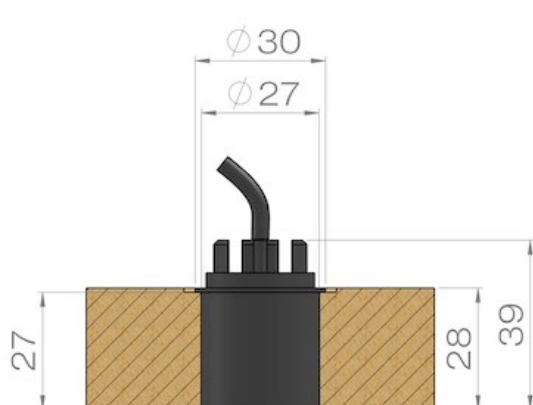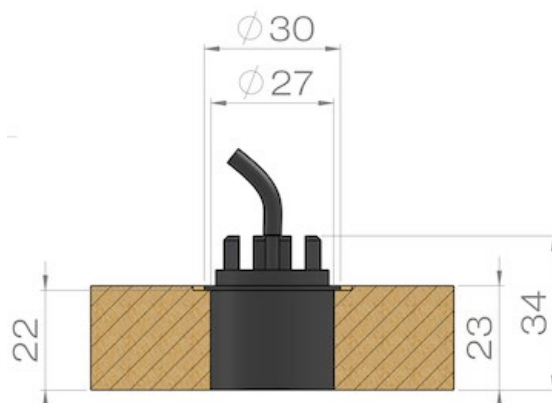

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

Louss

Last update : 2025.08.19 - R

3/9


BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best & LOUSS

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



MINIFILED LOW LUMINANCE BEVELED

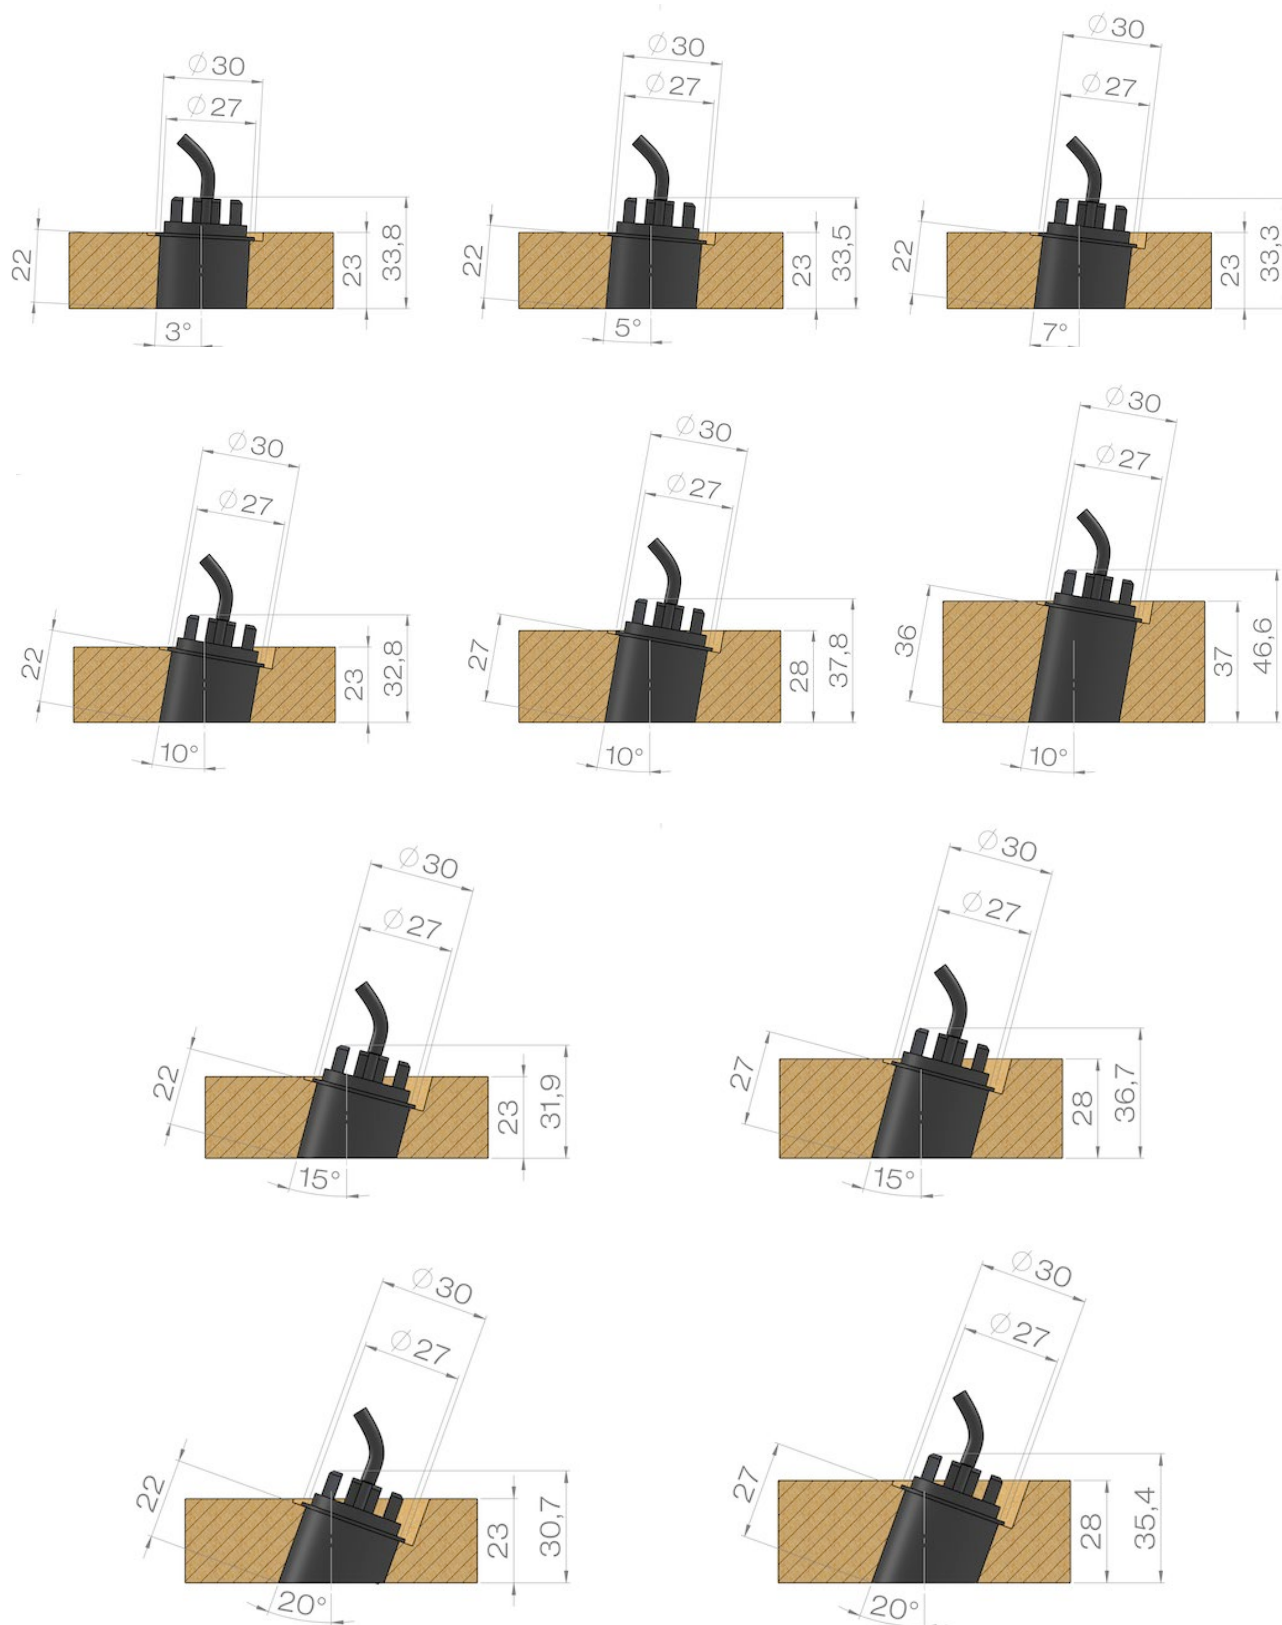

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

Louss

Last update : 2025.08.19 - R

4/9

BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z



Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best & LOUSS

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



MINIFILED SIMPLE & LOW LUMINANCE

Installation from above

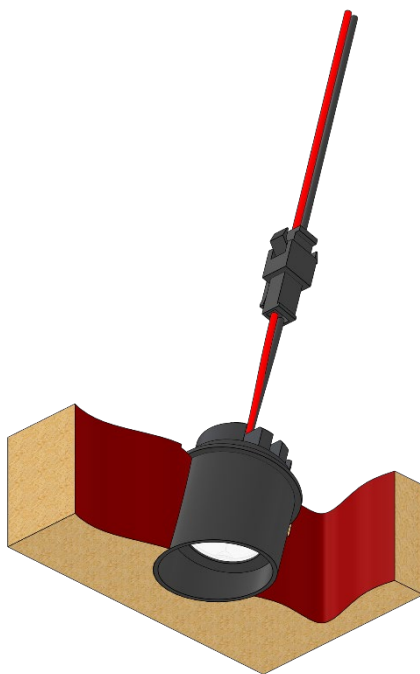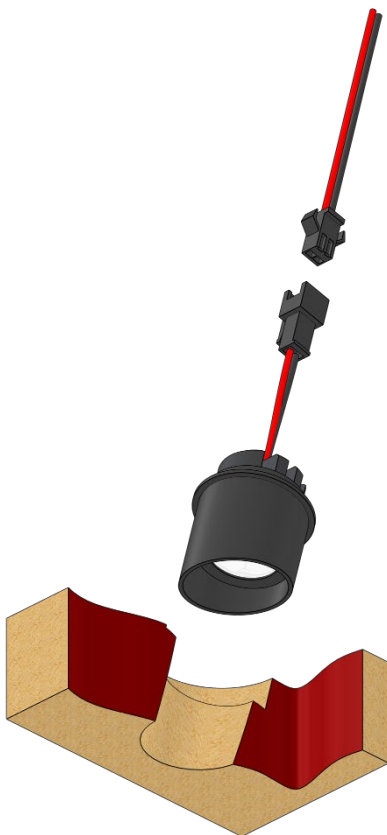

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

Louss

Last update : 2025.08.19 - R

5/9


BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best & LOuss



Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



MINIFILED SIMPLE MAGNETIC

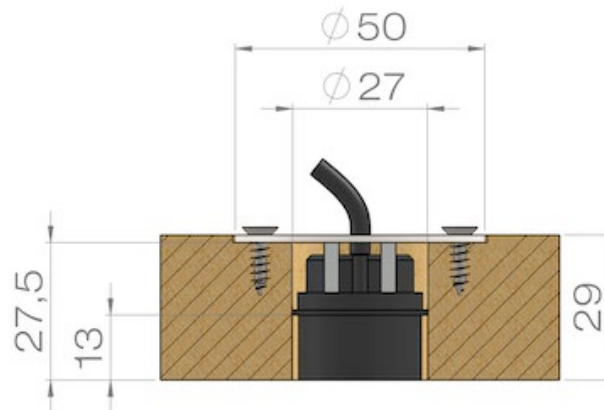

MINIFILED LOW LUMINANCE MAGNETIC STRAIGHT

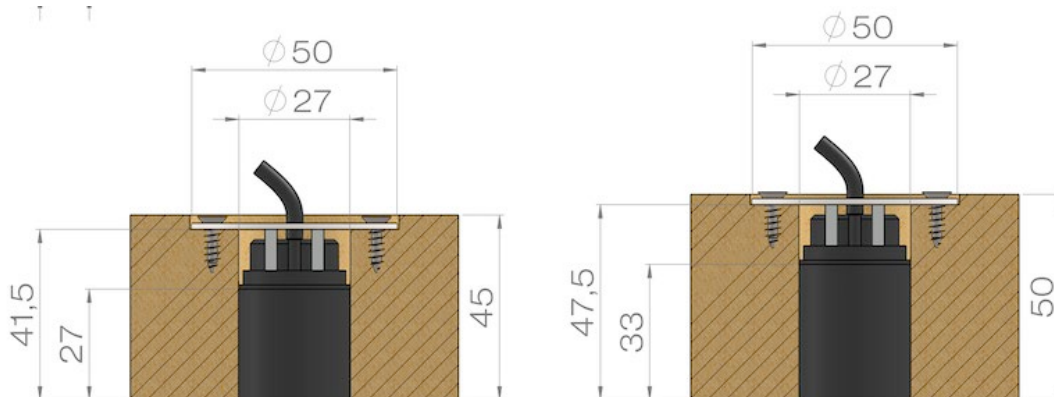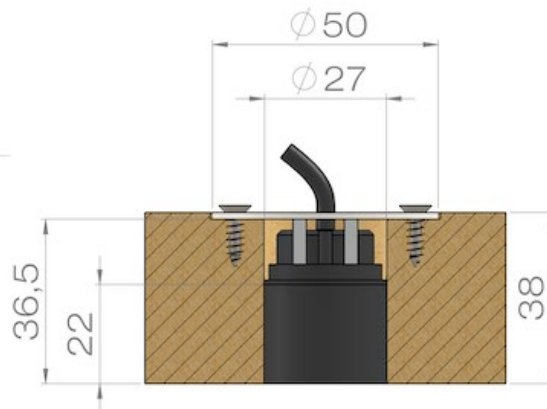

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

Louss

Last update : 2025.08.19 - R

6/9

BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best & LOUSS

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



MINIFILED LOW LUMINANCE MAGNETIC BEVELED



All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

Louss

Last update : 2025.08.19 - R

7/9

BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z


Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best & LOUSS

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



MINIFILED SIMPLE & LOW LUMINANCE MAGNETIC

Installation from below

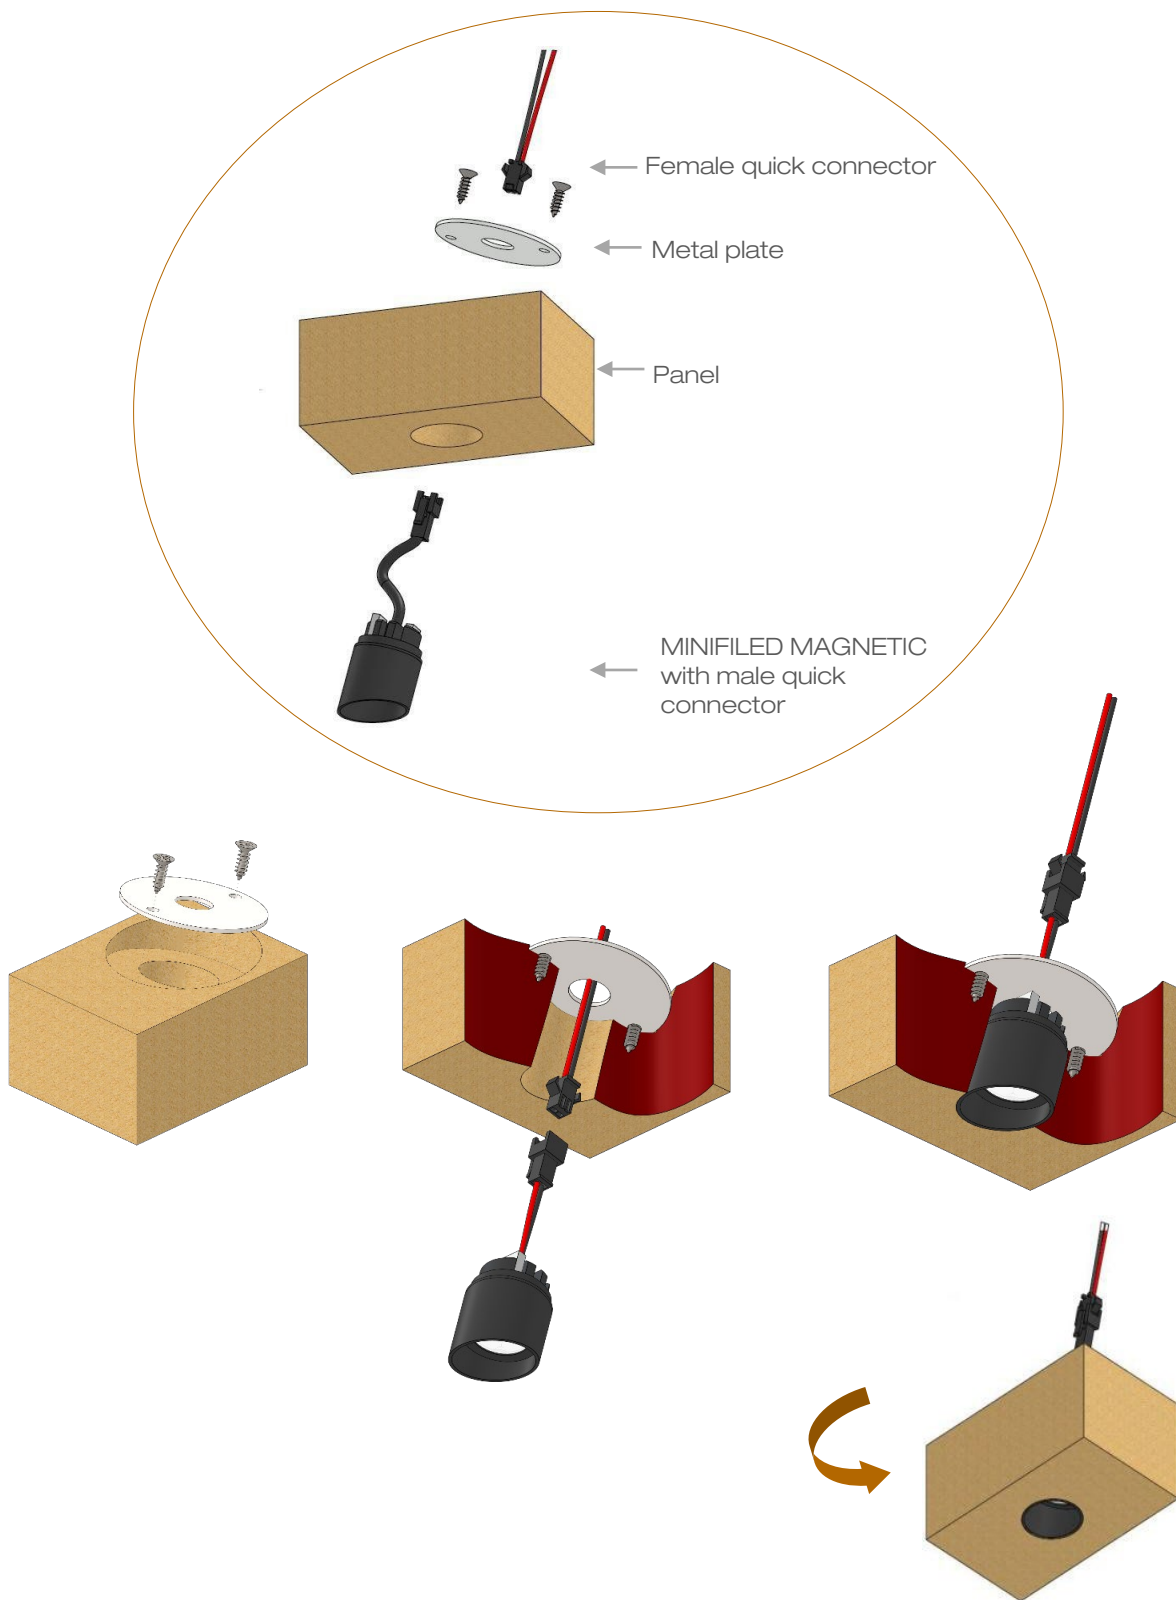

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.

Louss

Last update : 2025.08.19 - R

8/9

BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z



Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best & LOuss

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE





MINIFILED LOW LUMINANCE STAIRS

Installation from below with mounting frame

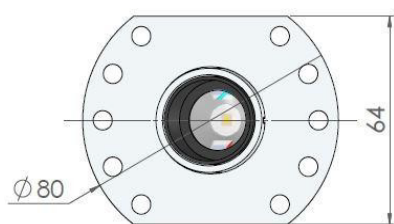


Angle 15°

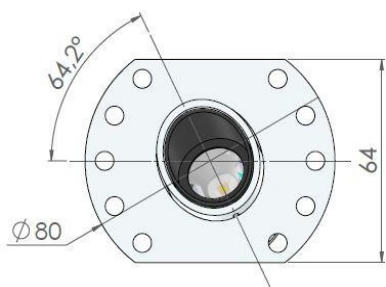

Angle : 75° + 61°

Other angles upon request

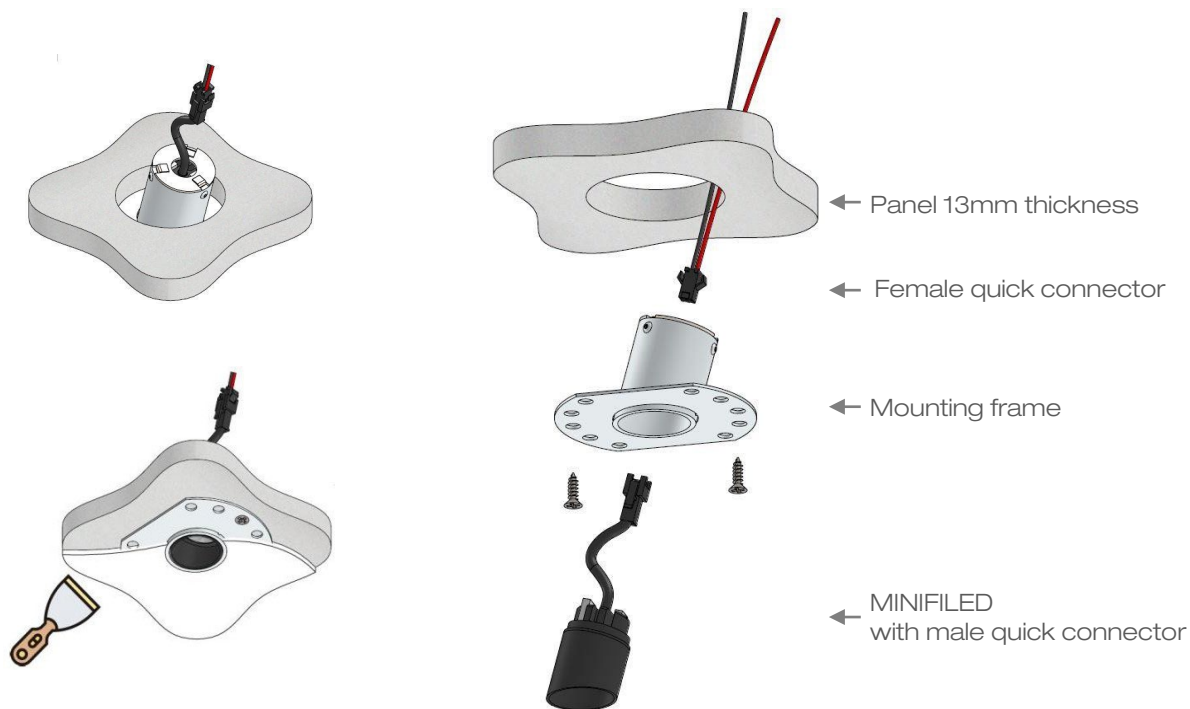

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

LOUSS

Last update : 2025.08.19 - R

9/9

BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best & LOUSS

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE