



## ROLLED GLISS



## ROLLED SPIKE

## On-Plate


## Hollow Hook

<b>Range</b>	Spotlight for the highlighting of architectural details	
<b>Description</b>	<p>1 LED or 3 LEDs floodlighting          Rotating ball on a bracket          Supplied in <b>Standard</b> version or with a <b>Low Luminance</b> tube          Mounted on a plate or on a Hollow Hook allowing the integration of the electrical connection          Rod length upon request up to 400mm</p>	
<b>Finish</b>	Stone hue RAL 1013 matt finish (other upon request)	
<b>Dimensions</b>	<b>Spotlight</b>	<b>Holding device</b>
	Diameter : 40mm Width : 51.3mm (bracket included) Length : 51mm ( <b>Low Luminance</b> ) Total length : 83mm (fixation included)	Rod height : 400mm max. Plate dimensions : 75 x 25mm Hook dimensions : 110 x 110 x 60mm
<b>LED characteristics</b>	1 LED or 3 LEDs : 2700K – 3000K – 4000K – 5000K (other upon request) CRI 80	
<b>Optical beams</b>	Intensive – Semi intensive – Extensive – Elliptical	
<b>Connection</b>	Supplied with 1m cable (more length upon request)	
<b>Power supply</b>	<b>On-Plate version</b> : 700mA max. <b>external</b> constant current driver <b>Hollow Hook version</b> : 700mA max. <b>integrated</b> constant current driver For the US & Canada use a UL class 2 driver	
<b>LED power</b>	<b>1 LED</b> : 2.4W at 700mA max. <b>3 LEDs</b> : 7.2W at 700mA max.	
<b>Use limitations</b>	The drivers, if not delivered by LOuss, must be approved before use	
<b>Warranty</b>	<p>Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature            3-year parts and labor warranty</p> <p>The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product</p> <p>All products are electrically tested and received a functional burn-in</p>	

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.


## ROLLED GLISS

### On-Plate version

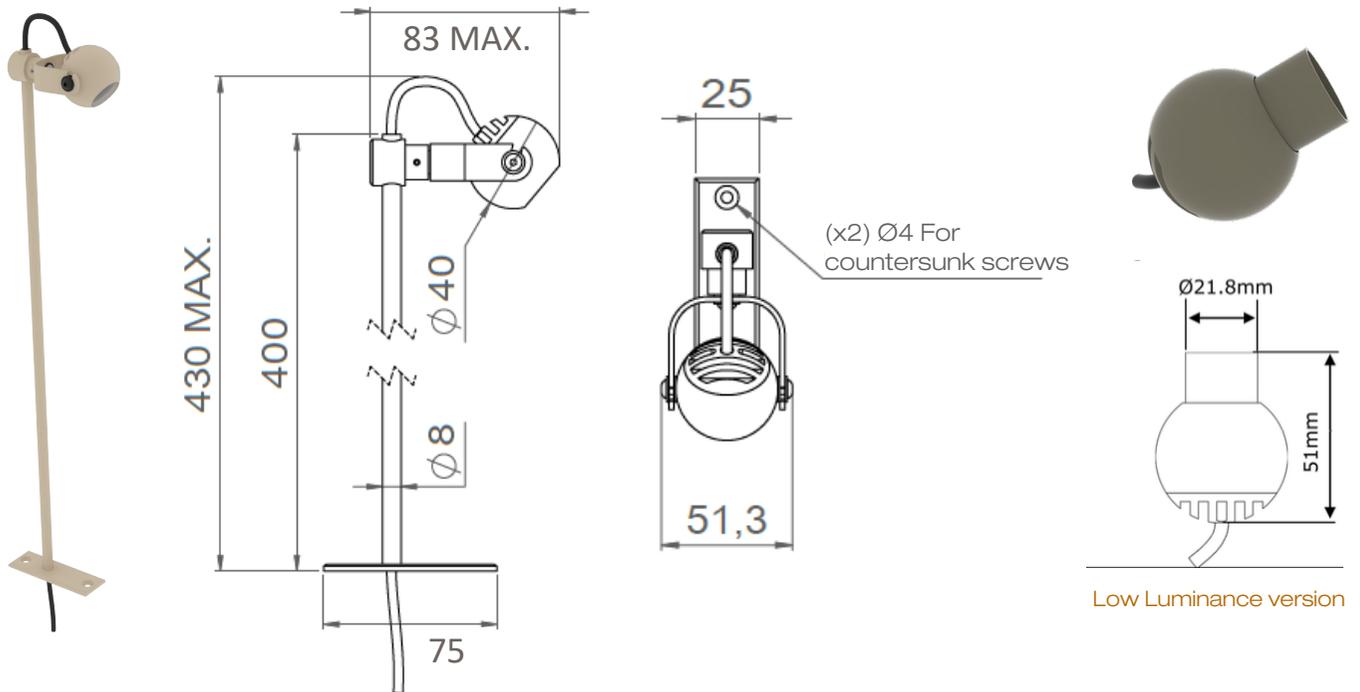

## ROLLED GLISS

### Hollow Hook version

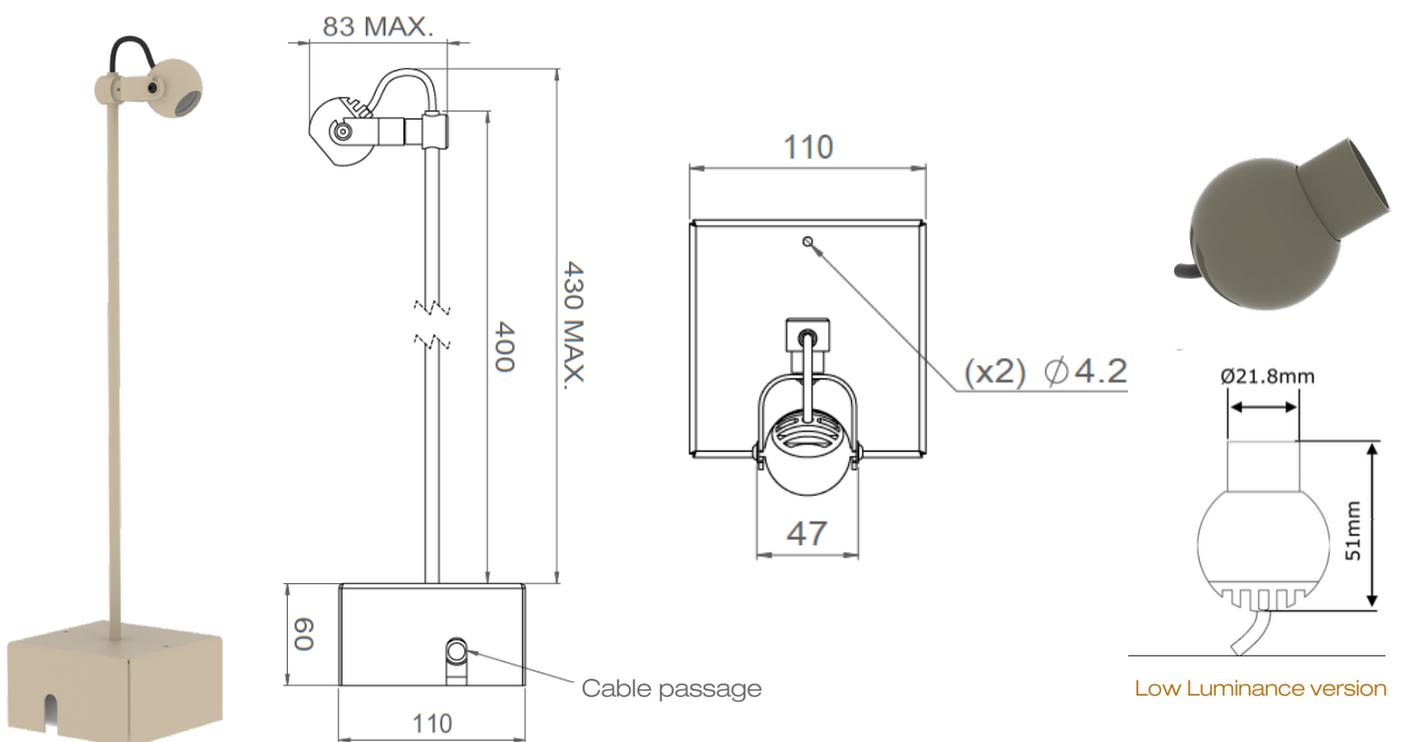

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.