



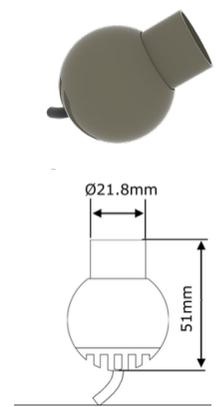

ROLLED SPIKE

The garden lighting specialist

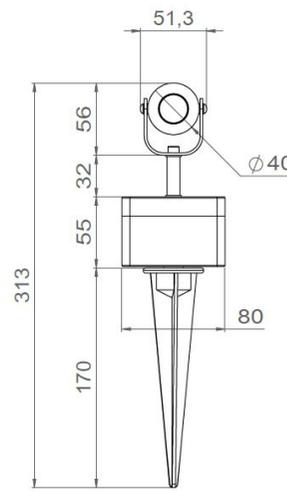

Low Luminance version

ROLLED SPIKE

Standard

Low Luminance

Range	Garden & outdoor multi-purpose floodlighting	
Description	<p>1 LED or 3 LEDs floodlighting</p> <p>Rotary ball on bracket</p> <p>Supplied in Standard version or with a Low Luminance tube</p> <p>Waterproof junction box and connectors</p> <p>Ground rod</p>	
Finish	Khaki RAL 7013 (other upon request)	
Dimensions	Spotlight	Junction box & Ground rod
	<p>Diameter : 40mm</p> <p>Length : 51mm (Low Luminance)</p> <p>Width : 51.3mm (bracket included)</p> <p>Height : 88mm</p>	<p>Rod height : 170mm</p> <p>Junction box length : 80mm</p> <p>Junction box height : 55mm</p>
LED characteristics	1 LED or 3 LEDs : 2700K – 3000K – 4000K – 5000K (other upon request) CRI 80	
Optical beams	Intensive – Semi intensive – Extensive – Elliptical	
Connection	Supplied with 1m cable (more length upon request)	
Integrated power supply	700mA max. integrated constant current driver in a waterproof junction box For the US & Canada use a UL class 2 driver	
LED power	<p>1 LED : 2.4W at 700mA max.</p> <p>3 LEDs : 7.2W at 700mA max.</p>	
Use limitations	The drivers, if not delivered by LOuss, must be approved before use	
Warranty	<p>Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature</p> <p>3-year parts and labour warranty</p> <p>The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product</p> <p>All products are electrically tested and received a functional burn-in</p>	

Tous les raccordements doivent impérativement être effectués avant la mise sous tension sous peine d'endommager sérieusement les LED