


LOUSS

Lighting Emotion



UNDO





Solo



Multiple



Recessed
Magnetic Trim



Recessed
Trim



Fixed Trimless

UNDO

Range	High power versatile luminaires for accent lighting, dedicated to precision lighting & highlighting of showcases	
Description	Solo & Multiple	Recessed Magnetic Trim
	Spotlights versions : <ul style="list-style-type: none"> • Standard • Standard with accessories • Low Luminance • Low Luminance with accessories Orientation 360° - Adjustable tilt 115° Spotlight(s) mounted on a metallic bar using fixing bracket(s)	Screw-in insert Magnetic spotlight
	Recessed Trim	Fixed Trimless
	Fixation with springs Standard or Low Luminance version	Mounting frame Simple straight or tilted version (10°-15°-20°) Double version (0° + 15°)
Finish	Black anodized aluminum matt finish (other upon request)	
Dimensions	Solo & Multiple	Recessed Magnetic Trim
	Dimensions per spotlight Diameter : 39.5mm Length : 37.1mm (Standard) 40.4mm (Standard + accessories) 52.2mm (Low Luminance) 55.4mm (LL + accessories) Bar dimensions Width : 8mm (without fixing brackets) Height : 8mm (without fixing brackets) Total height : 79mm max. (spotlight + bar)	External diameter : 51mm Spotlight diameter : 43mm Installation diameter : 45mm Installation depth : 51mm
	Recessed Trim	Fixed Trimless
	External diameter : 43.5mm Spotlight diameter : 39.5mm Installation diameter : 39.5mm Installation depth : 57mm (Standard) 73mm (LL)	Spotlight diameter : 44mm Installation depth : 67 to 80mm Fixing plate dimensions : 90 x 140mm 180 x 140mm (Double version)

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.



Solo



Multiple



Recessed
Magnetic Trim



Recessed
Trim



Fixed Trimless

UNDO

LED characteristics	1 LED or 4in1 LED : 2200K – 2700K – 3000K – 3500K – 4000K – 4500K – 5700K (other upon request) Or mix of color temperatures CRI 80 – 90 – 92 – 95 according to version
Optical beams	3.3° - 7° - 11° - 16° - 17° - 21° - 23° - 29° - 31° - 33° - 35° - 42° - 56° - 60° - Asymmetrical
Accessories	Filters, honeycomb grid upon request
Connection	Supplied with 0.5m cable (more length upon request) Individual or series connection on external constant current driver
External power supply	700mA max. External constant current driver For the US & Canada use a UL class 2 driver
LED power	9W at 700mA max.
Use limitations	The product must be installed into a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labor warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.

LOuss

Last update : 2025.07.15

3/11

BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z


Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best & LOuss

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE




UNDO SOLO UNDO MULTIPLE


Spotlights dimensions

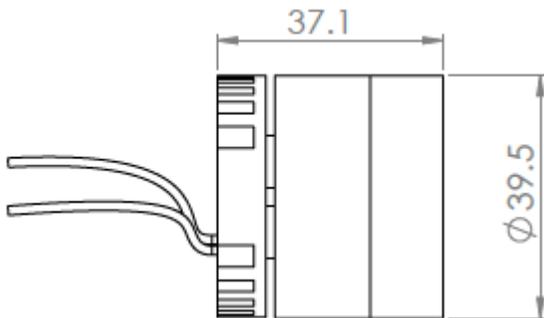


Standard version

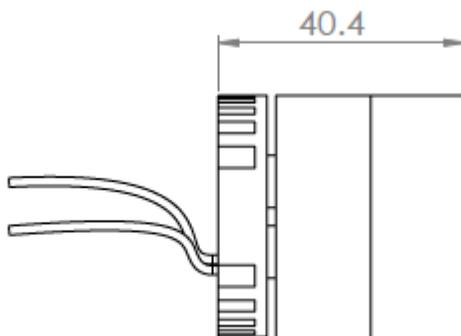

Standard + accessories version
(glass, filters, honeycomb grid...)

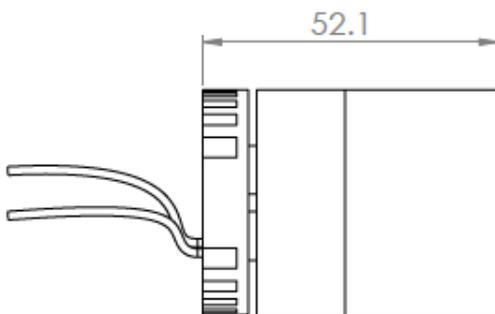

Low Luminance version

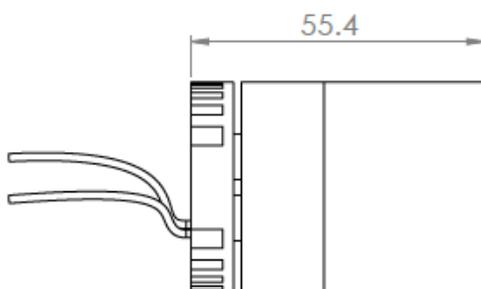

Low Luminance + accessories version
(glass, filters, honeycomb grid...)





All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.



UNDO MULTIPLE

Standard version

Low Luminance + accessories version

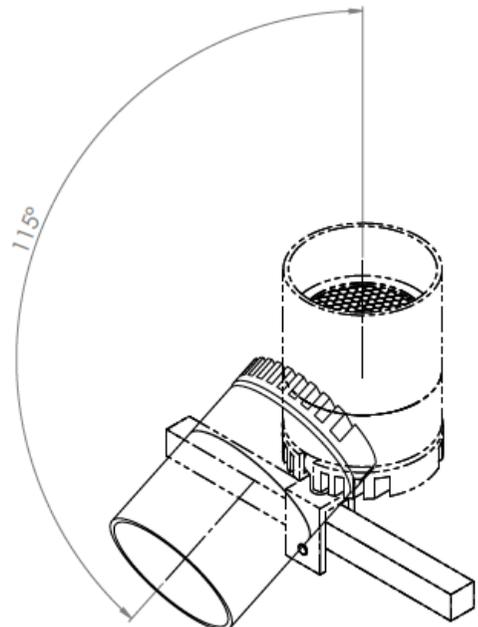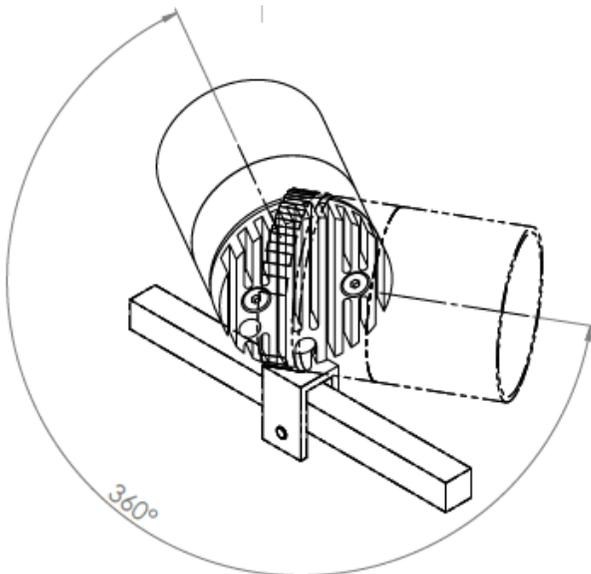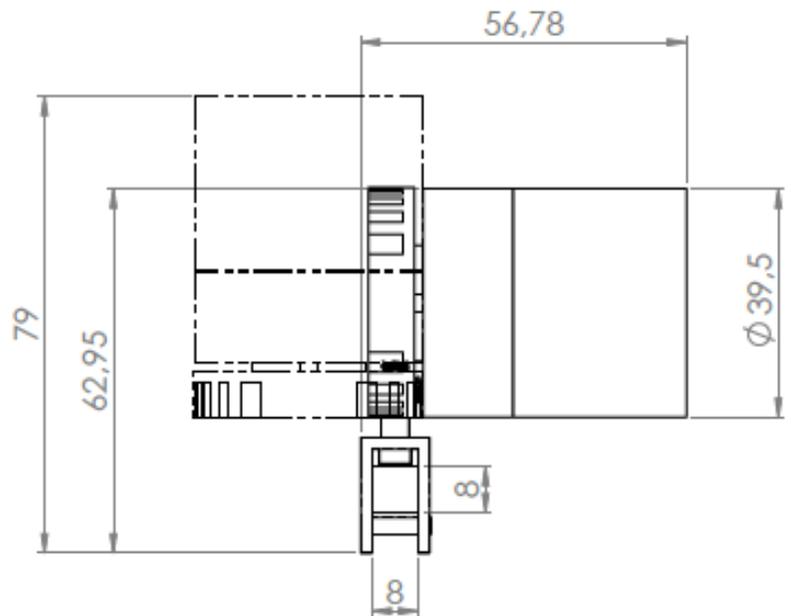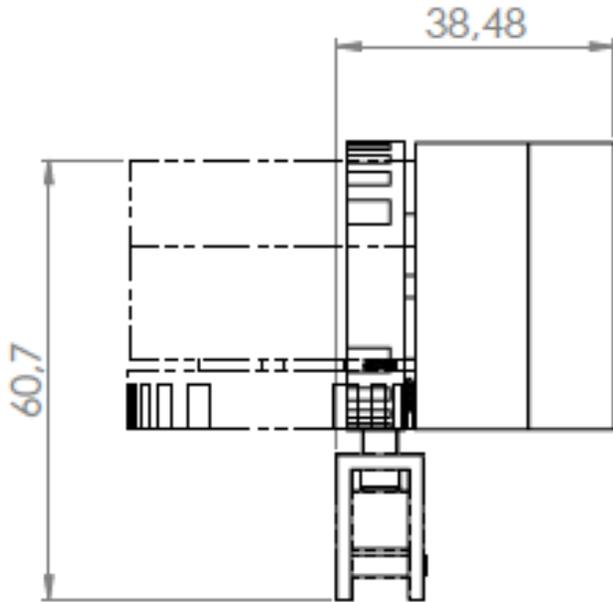

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

LOUSS

Last update : 2025.07.15

5/11

BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z


Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best & LOUSS

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



UNDO SOLO • MULTIPLE

Installation guide

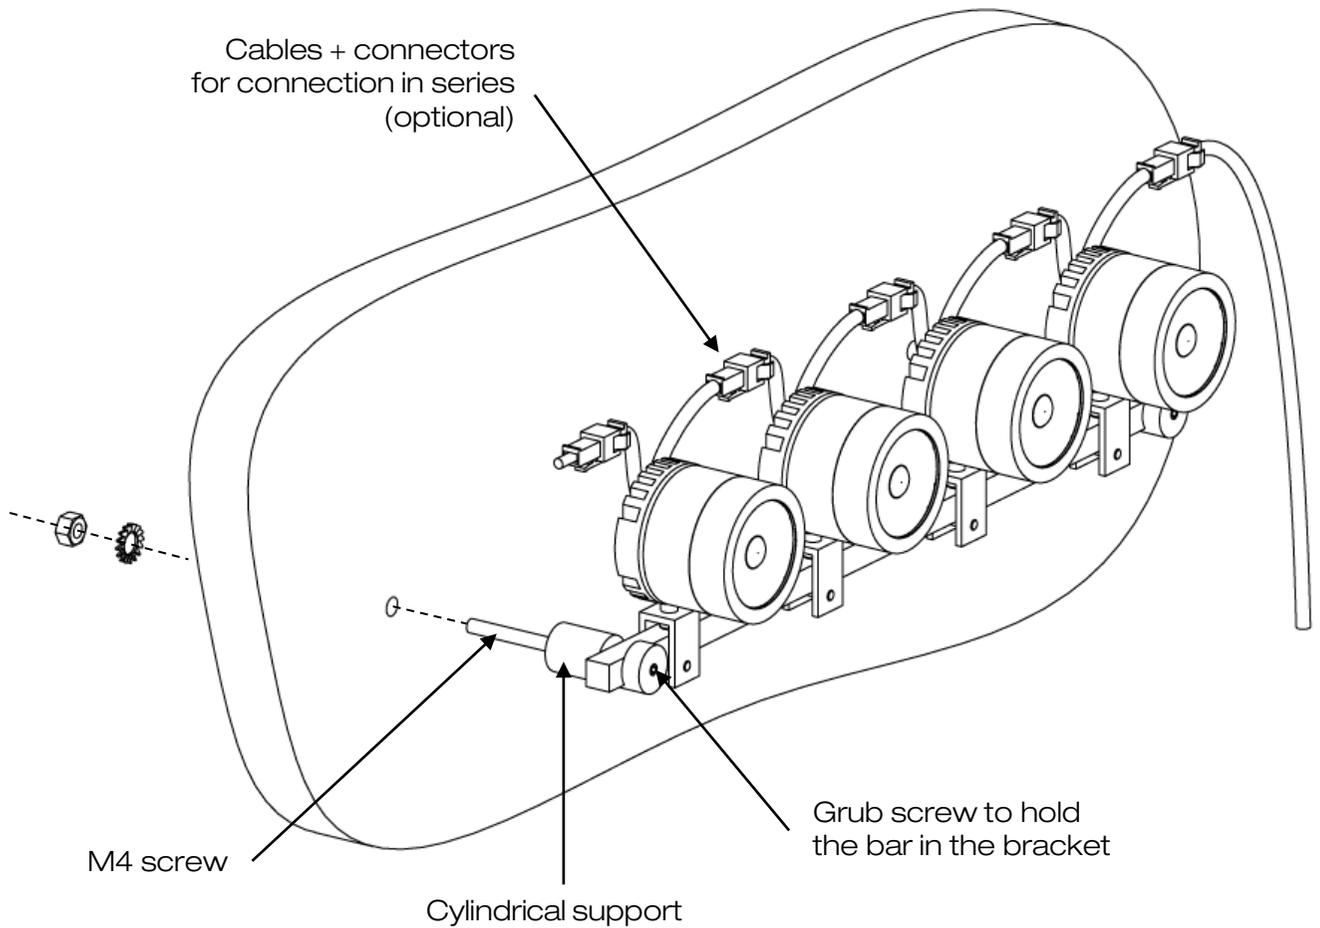




The number of cylindrical supports depends on the length of the bar and the number of spots

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.



UNDO RECESSED MAGNETIC TRIM

Dimensions & Installation guide

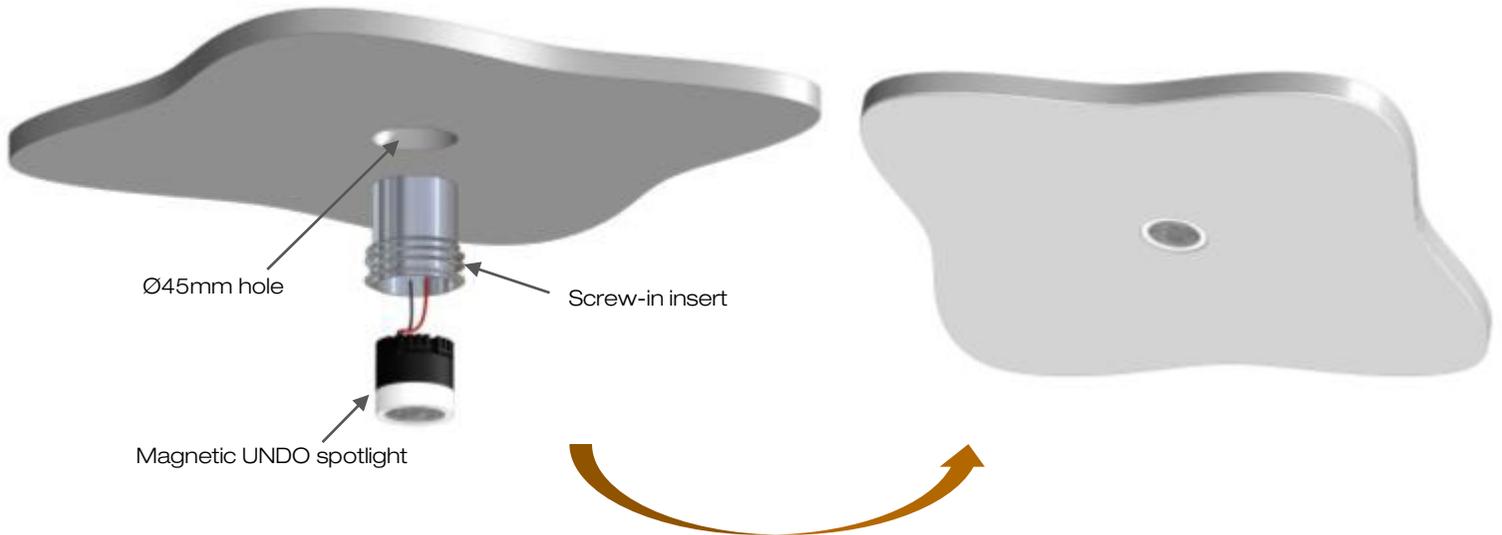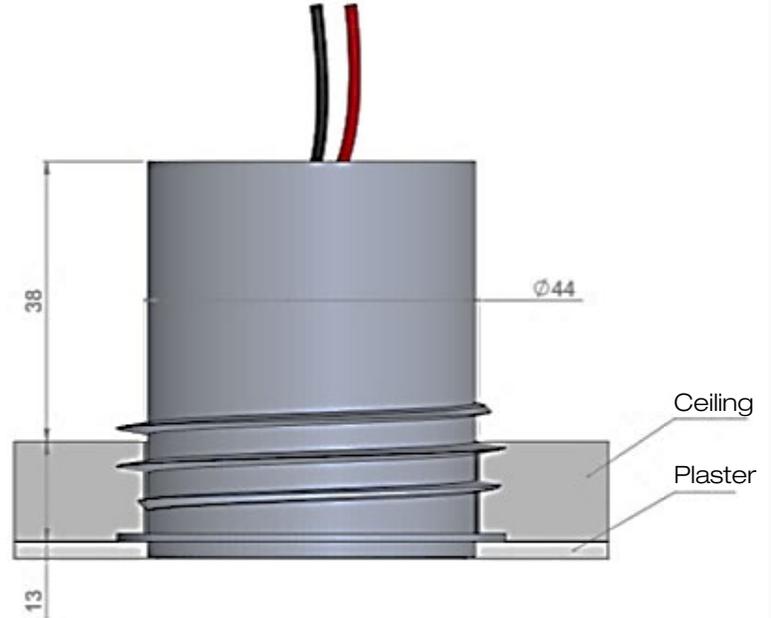
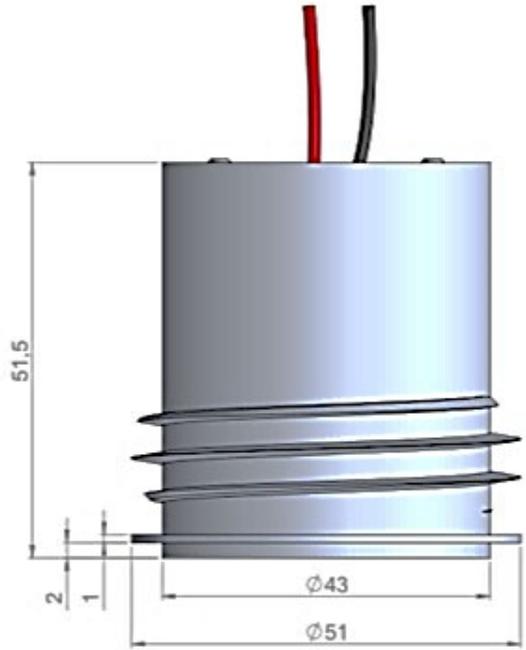


All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.





UNDO RECESSED TRIM

Standard version

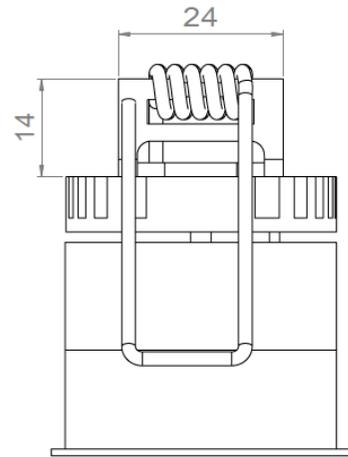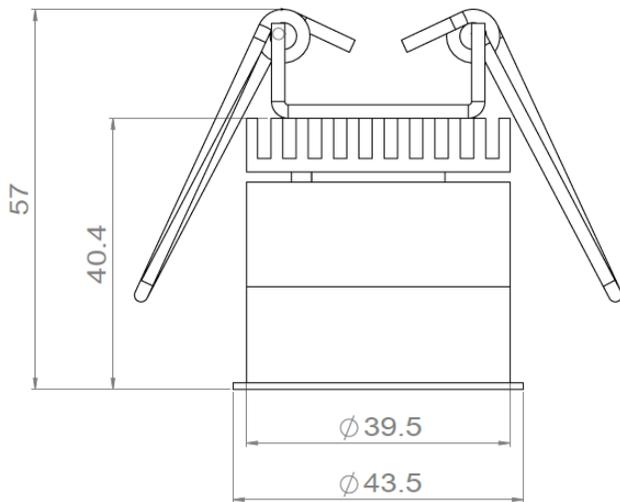



Low Luminance version

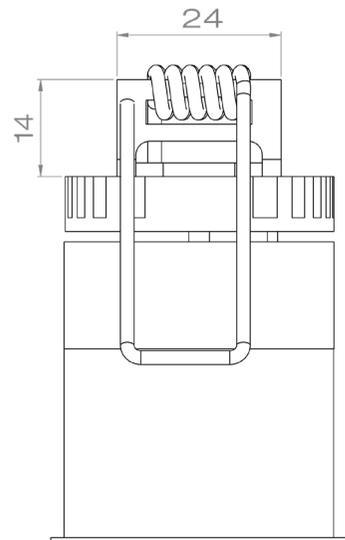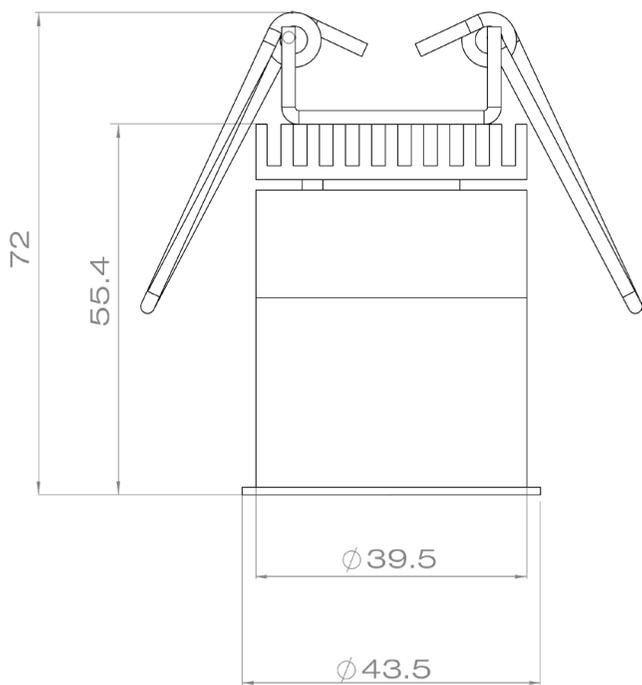

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.






UNDO FIXED TRIMLESS 0° version

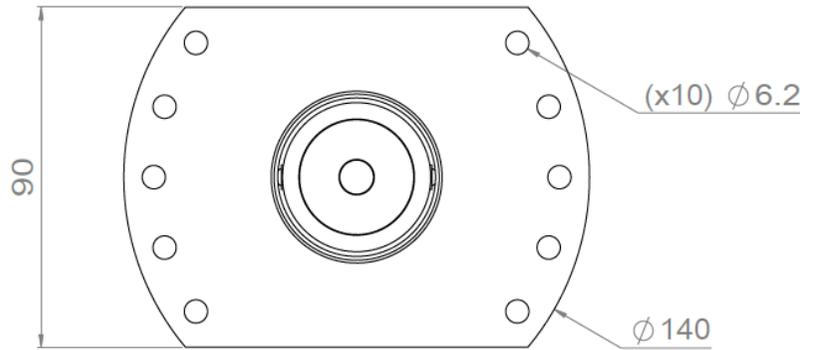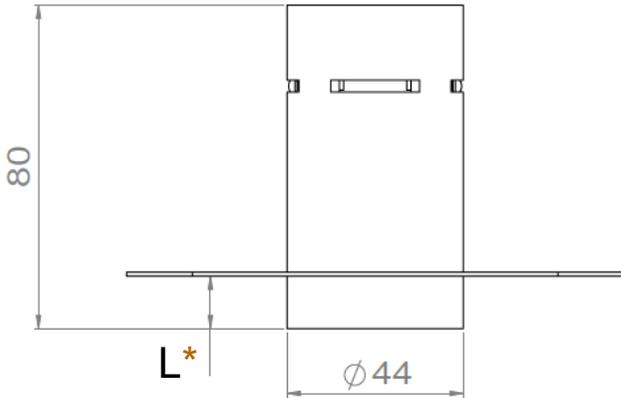

L* : 1mm to 13mm to be specified when ordering
(other lengths upon request)



UNDO FIXED TRIMLESS 10° version

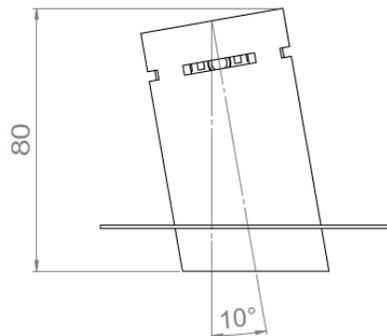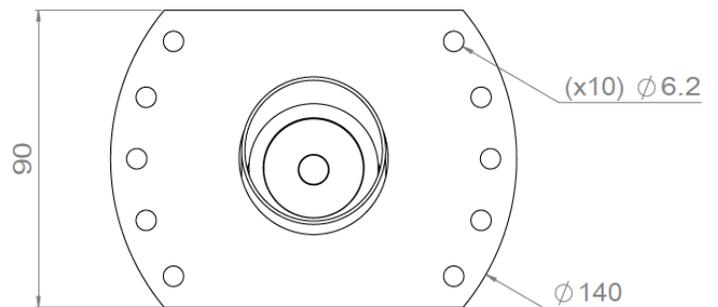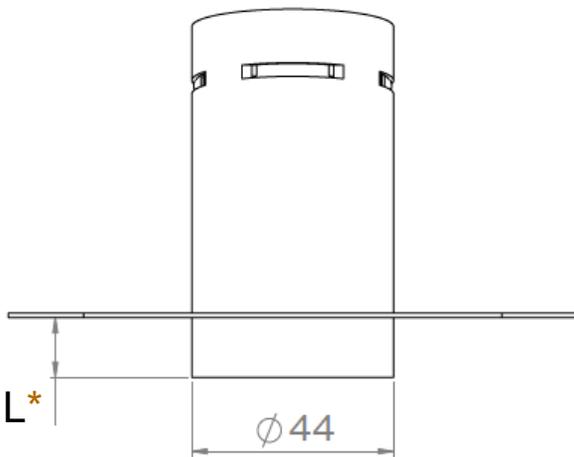

L* : 1mm to 13mm to be specified when ordering
(other lengths upon request)

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

LOUSS

Last update : 2025.07.15

9/11



BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best & LOUSS


Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE





UNDO FIXED TRIMLESS 15° version

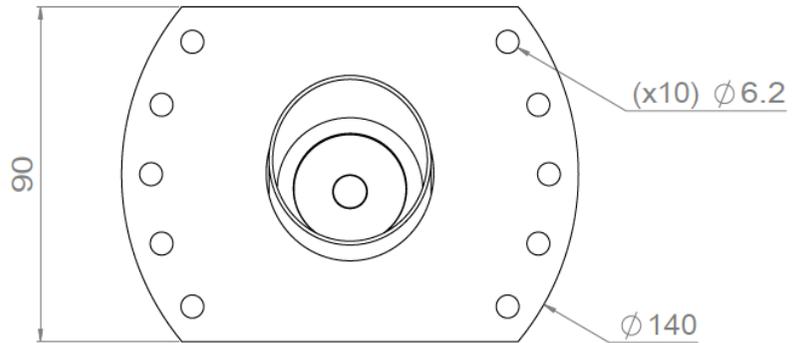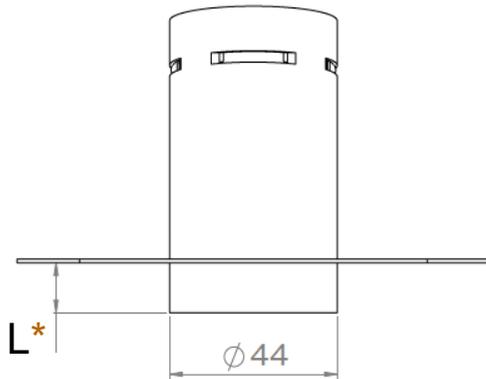


L* : 1mm to 13mm to be specified when ordering
(other lengths upon request)



UNDO FIXED TRIMLESS 20° version

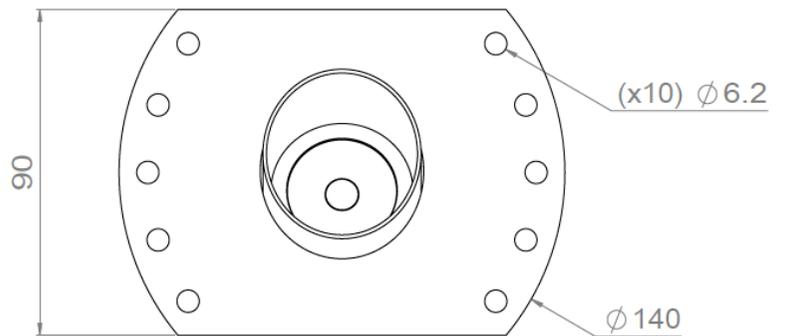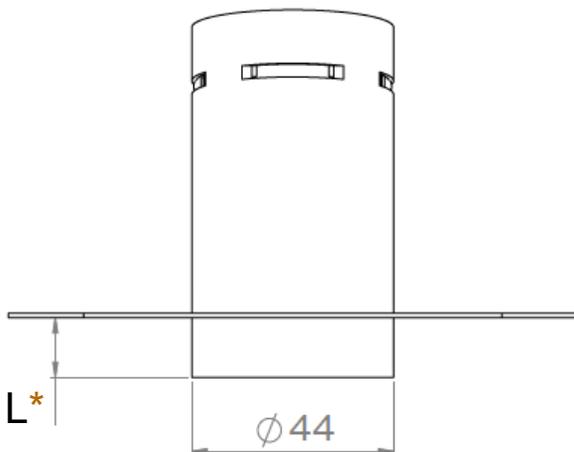

L* : 1mm to 13mm to be specified when ordering
(other lengths upon request)




All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.




UNDO FIXED TRIMLESS Installation Guide

Installation from above




Install the recessed box from above and screw it into the surface



Cover the lateral plates of the recessed box by coating and painting




Insert the spotlight from below

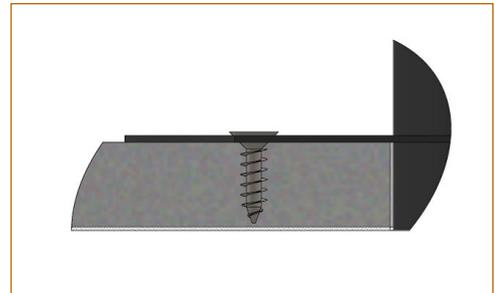

Installation from below




Install the recessed box from below and screw it into the surface



Cover the lateral plates of the recessed box by coating and painting



Insert the spotlight from below

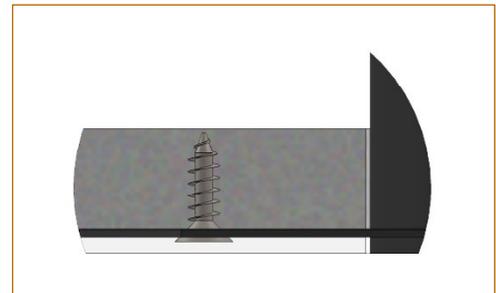

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.