


Wouss

Lighting Emotion



ANNECY BOLLARD





ANNECY BOLLARD



Range	Outdoor accent lighting pillar
Description	Stainless steel bollard and base 4 spotlights, vertically adjustable from 30° to 40° max. according to optical beam
Finish	Grey RAL 9006 matt finish (other upon request)
Dimensions	Diameter : 139.7mm Height : 953mm (base included) Base dimensions : 300 x 300mm
Net weight	22 kg
LED characteristics	2200K – 2700K - 3000K – 4000K – 5000K – 6500K (other upon request) Or mix of color temperatures
Optical beams	6° - 10° - 15° - 35° (other upon request)
Luminous flux	350 lumen max.
Connection	Supplied with 1m cable (more length upon request)
Integrated power supply	230V ON/OFF or dimmable driver upon request For the US & Canada use a UL class 2 driver
LED power	16W at 350mA max
Use limitations	The drivers, if not delivered by LOuss, must be approved before use
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature 3-year parts and labor warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.



ANNECY BOLLARD





Dimensions

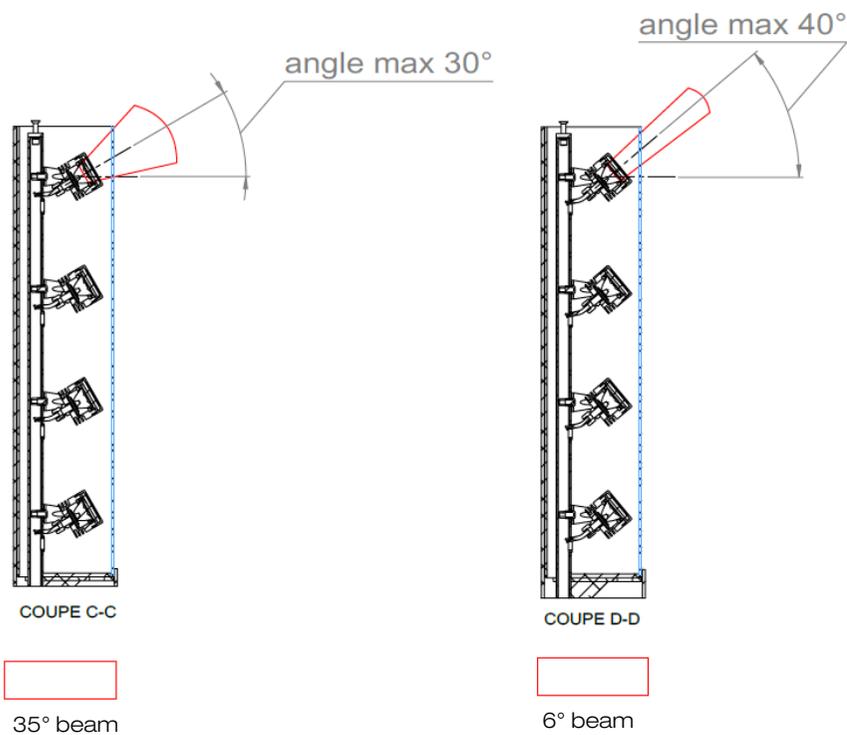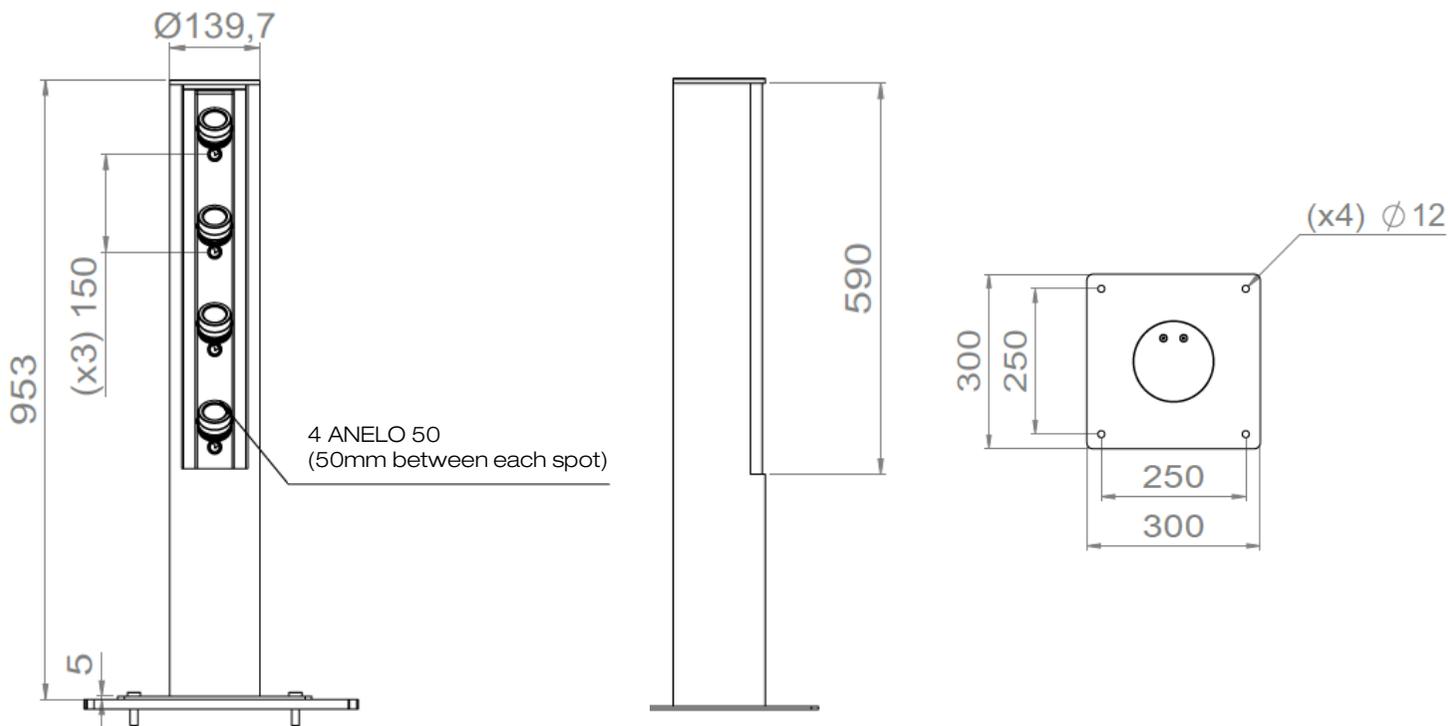

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.



ANNECY BOLLARD Installation's instructions

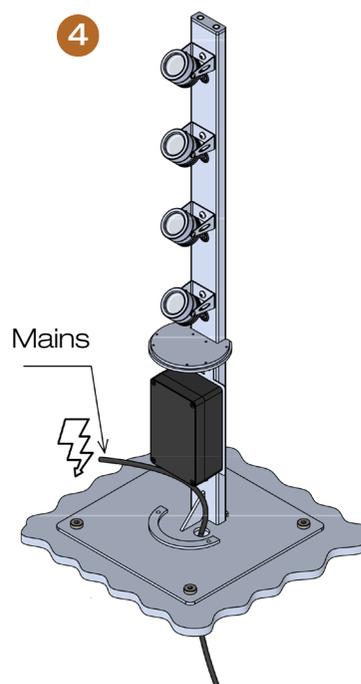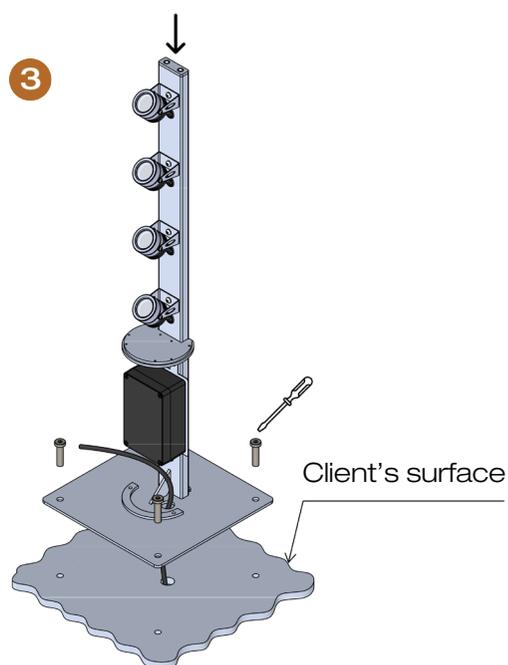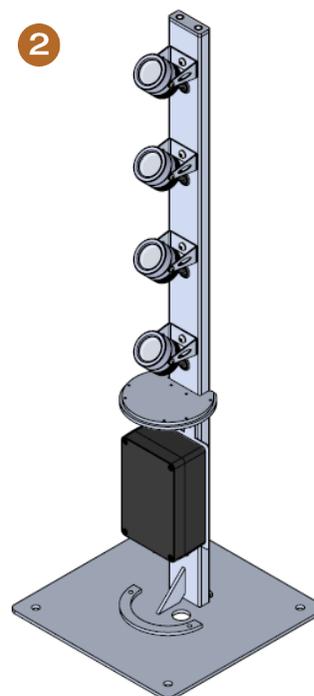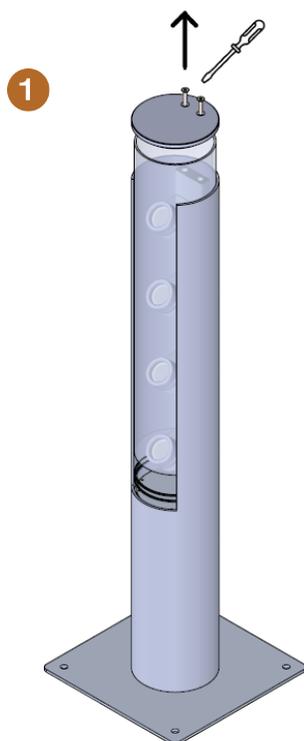


All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.




ANNECY BOLLARD

Installation instructions


5

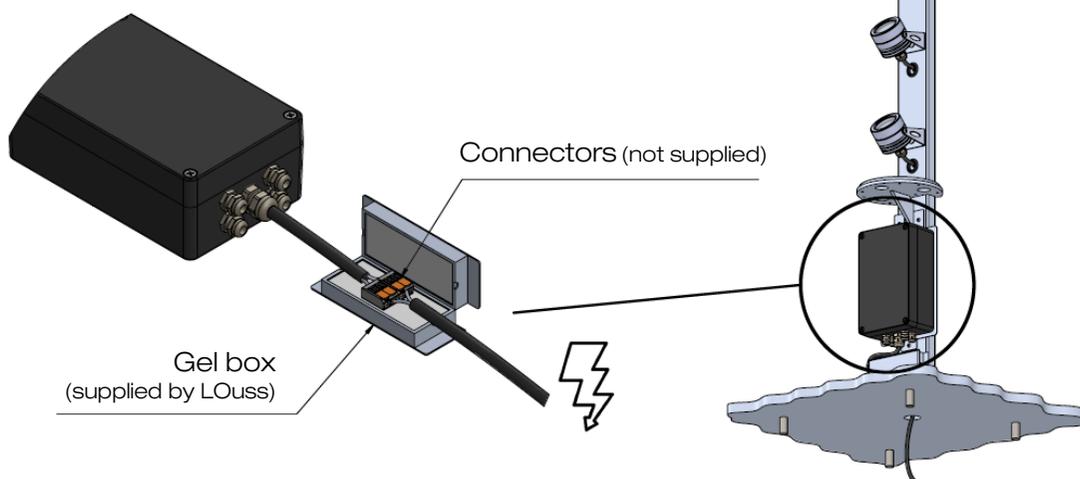

6

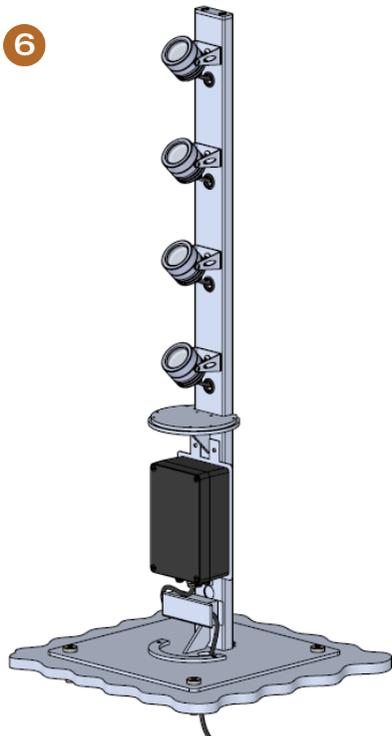

7

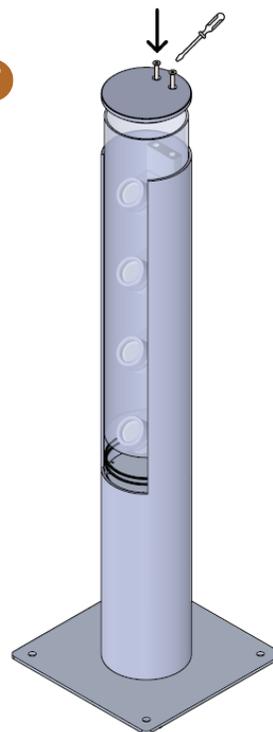

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.