


LOUSS

Lighting Emotion



DOMINO

The autonomous
ultra-intensive cube






DOMINO • 1 LED • 1 LED Visor • 5 LEDs • 5 LEDs Visor

Range	Adjustable surface mounted projector for architectural floodlighting	
Description	Aluminum body Stainless steel fixing bracket Supplied in Standard version or with a Visor Black silkscreen glass Adjustable tilt 120°	
Finish	Black RAL 9005 matt finish (other upon request)	
Dimensions & Weight	1 LED	5 LEDs
	Spotlight dimensions : <ul style="list-style-type: none"> • 57 x 57 x 53mm (Standard version) • 64 x 64 x 86mm (Visor version) Brackets dimensions : 56 x 35 x 46mm Weight (without visor) : 0.40 kg	Spotlight dimensions : <ul style="list-style-type: none"> • 110 x 110 x 80mm (Standard version) • 117 x 117 x 143mm (Visor version) Brackets dimensions : 105 x 56 x 69mm Weight (without visor) : 1.60 kg
LED characteristics	1 LED or 5 LED : 2700K – 3000K – 3500K – 4000K (other upon request) CRI 80 – 90 - 95	
Optical beams	3° - 6° - 8° - 10° - 15° - 25° - 35° - 45° - 60° - Elliptical	
Connection	Supplied with 1m cable (more length upon request)	
Integrated power supply	230V Optional : DMX 48V upon request For the US & Canada use a UL class 2 power supply	
LED power	1 LED : 2W 5 LEDs : 10W	
Use limitations	The drivers, if not delivered by LOuss, must be approved before use	
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature 3-year parts and labour warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in	


All the connections have to be made before powering up, otherwise the luminaire could be seriously damaged.



DOMINO 1 LED Standard version

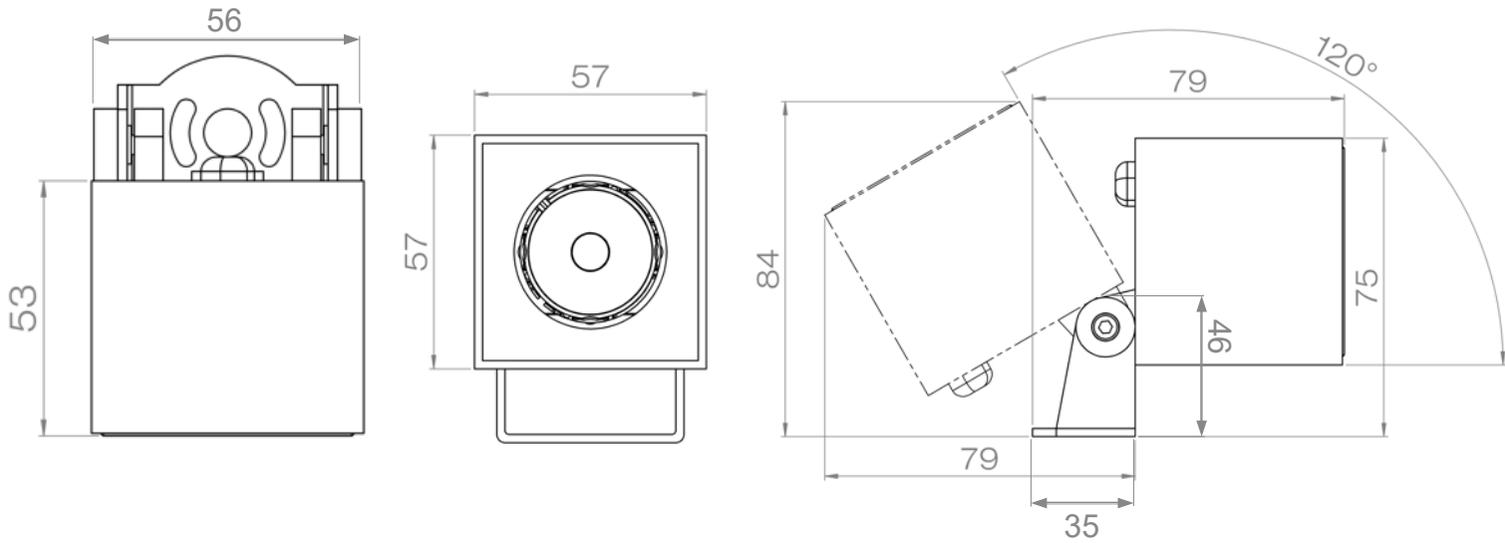


DOMINO 1 LED Visor version

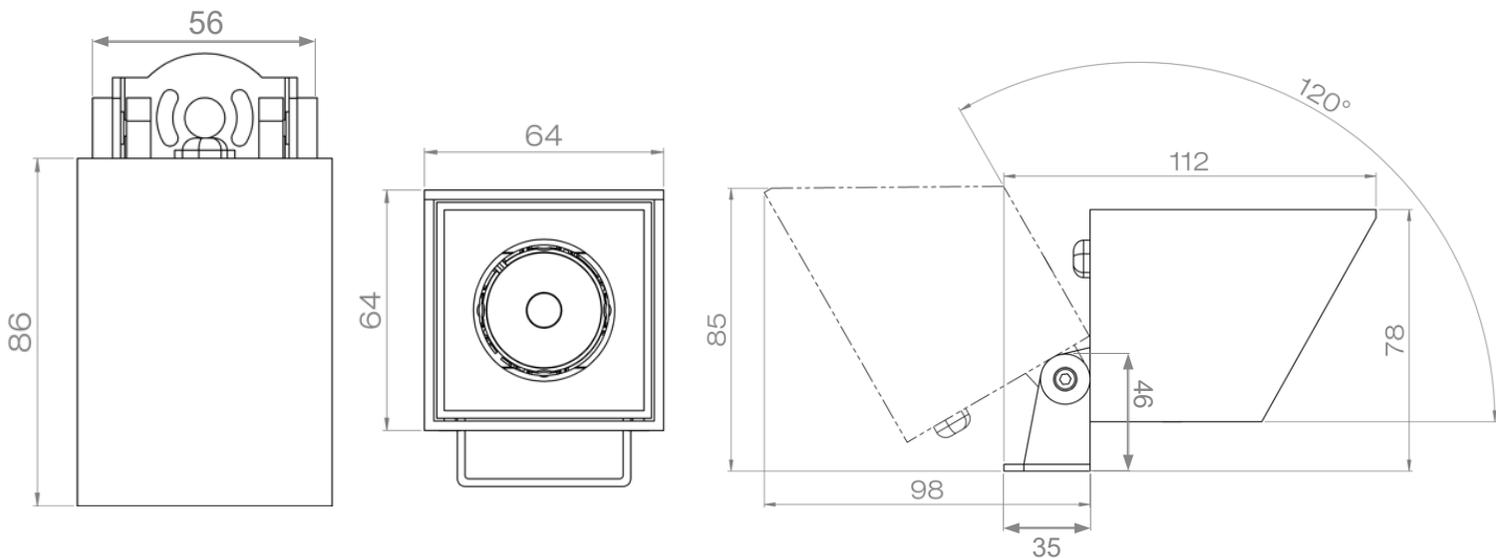


All the connections have to be made before powering up,
otherwise the luminaire could be seriously damaged.



DOMINO 5 LED Standard version

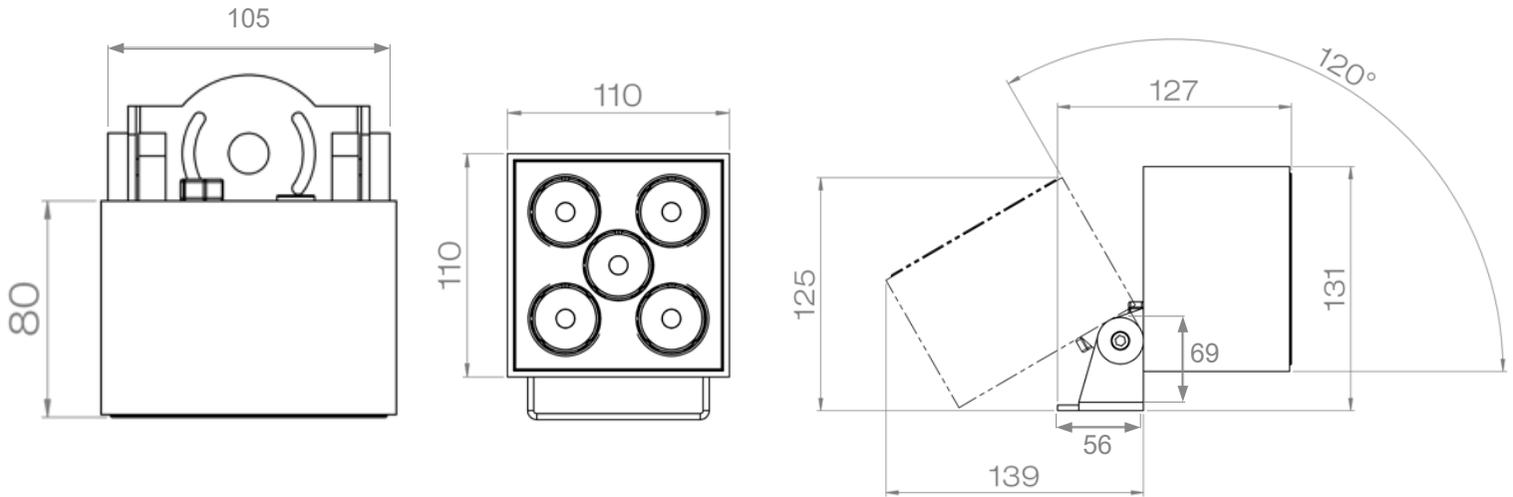

DOMINO 5 LED Visor version

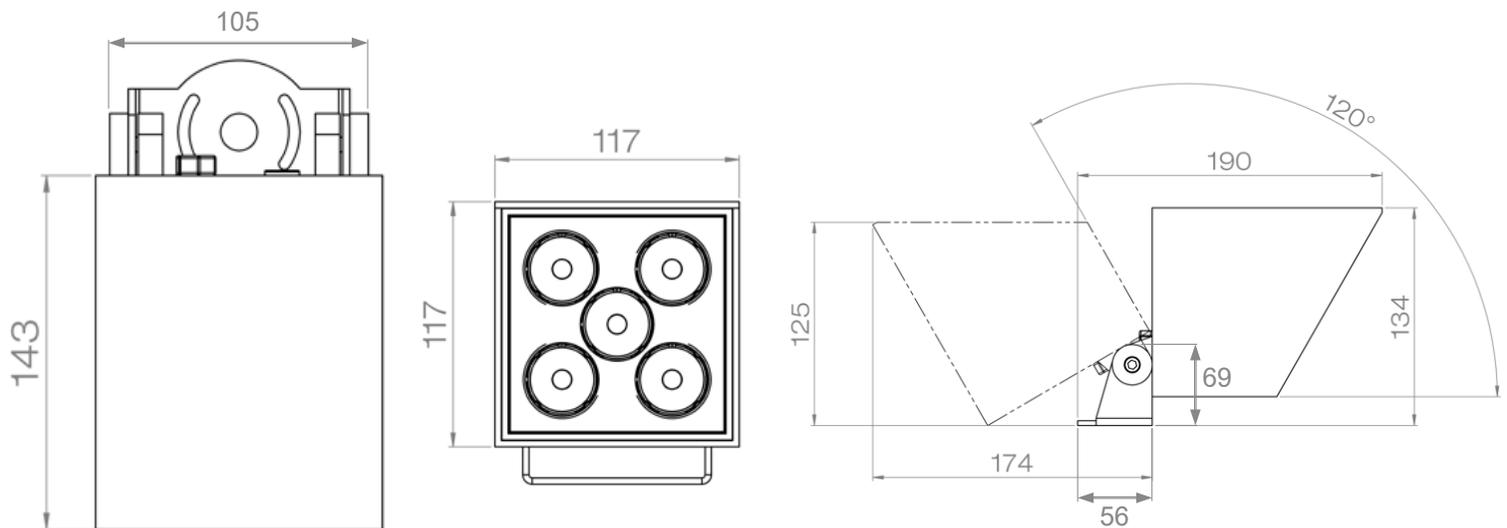

All the connections have to be made before powering up,
otherwise the luminaire could be seriously damaged.